



INDIVIDUAL CLIP

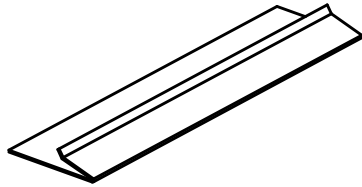


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

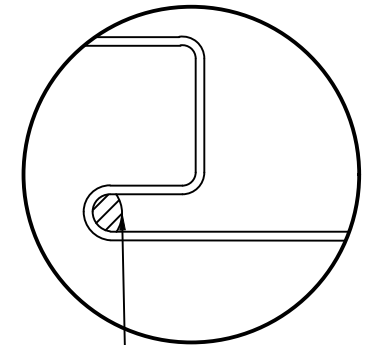

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

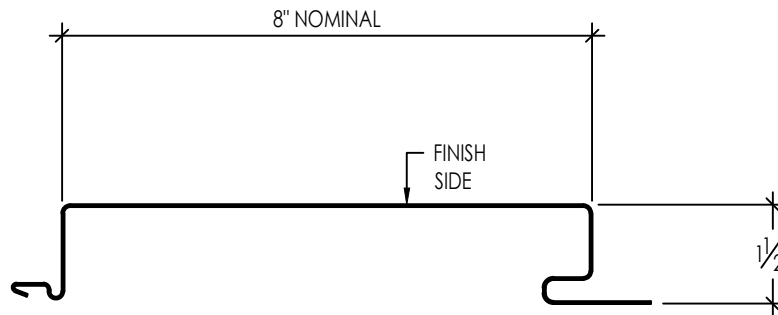


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:		F-8-0
	GAUGE:		JOB NAME:	
	YES ☐ NO ☐	SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐	P.N.: C260	
	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐			REV.: 04/04/2024
	FACTORY CAULK: YES ☐ NO ☐			BY: CL




INDIVIDUAL CLIP

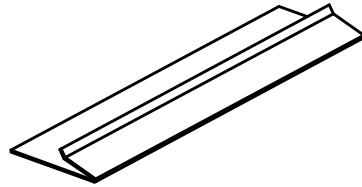


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

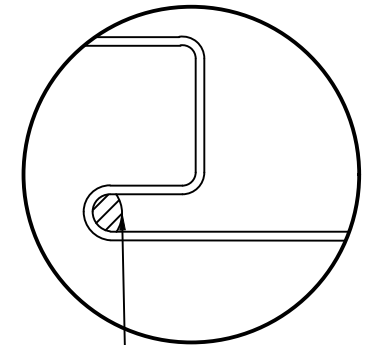

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

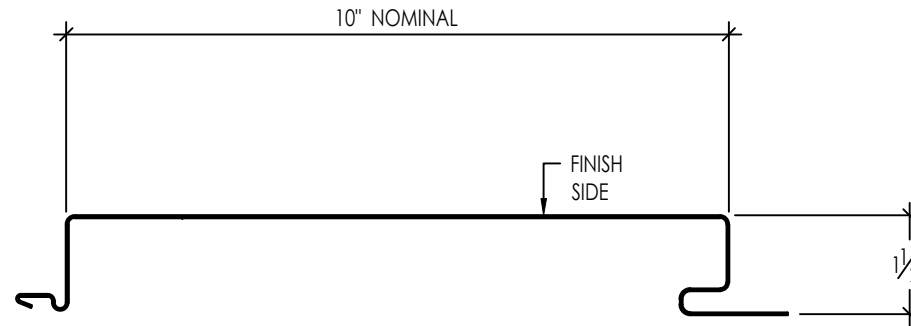


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:		F-10-0
	JOB NAME:		P.N.: C213	
	GAUGE:	SMOOTH ☐ EMBOSSSED ☐	PERF.: Y ☐ N ☐	REV.:04/04/2024
	YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐		
	FACTORY CAULK: YES ☐ NO ☐		BY: CL	




INDIVIDUAL CLIP

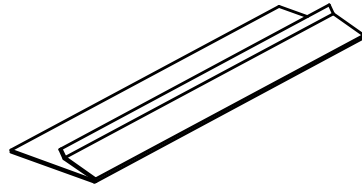


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

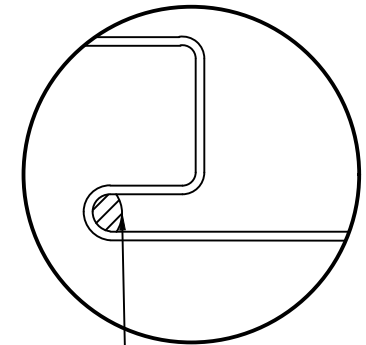

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

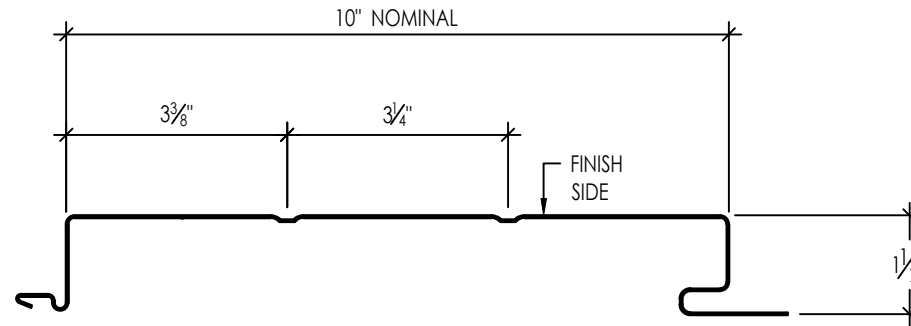


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:		F-10-2 P.N.: C265 REV.: 04/04/2024 BY: CL
	GAUGE:	JOB NAME:		
	YES ☐ NO ☐	SMOOTH ☐ EMBOSSED ☐ PERF.: Y ☐ N ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐	
	FACTORY CAULK: YES ☐ NO ☐			




INDIVIDUAL CLIP

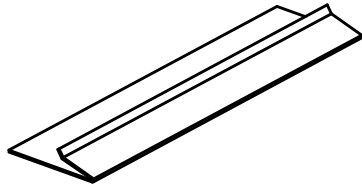


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

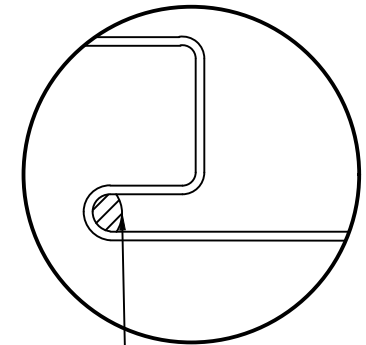

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

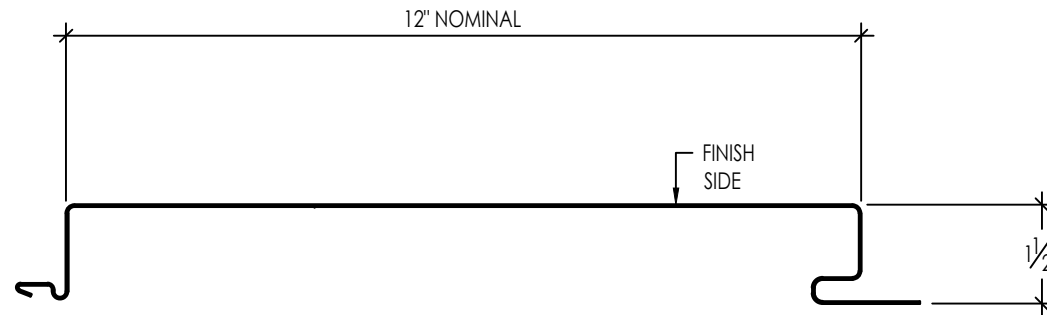


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:		F-12-0
	JOB NAME:		P.N.: C200	
	GAUGE:	SMOOTH ☐ EMBOSSSED ☐	PERF.: Y ☐ N ☐	REV.:04/04/2024
	YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐		
	FACTORY CAULK: YES ☐ NO ☐		BY: CL	




INDIVIDUAL CLIP

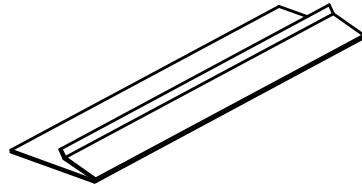


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

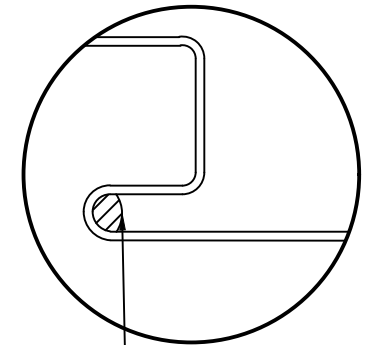

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

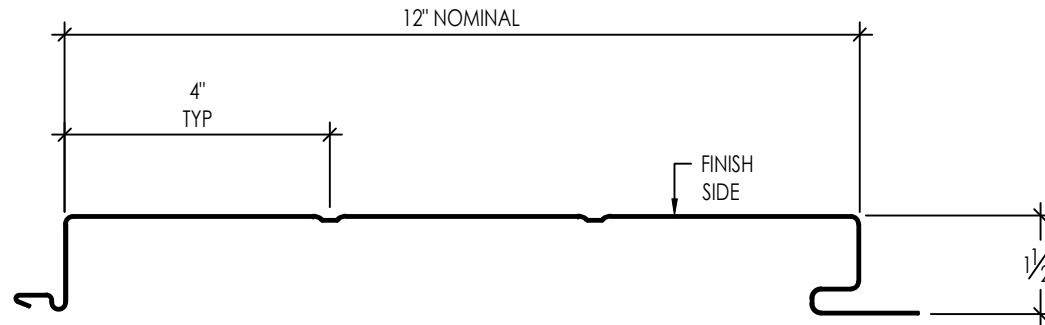


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

	APPROVED BY:		DATE:	JOB NO.:	F-12-2	
	CUSTOMER:			JOB NAME:	P.N.: C202	
	COLOR:	GAUGE:		SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐	REV.: 04/04/2024	
	BACKSIDE EXPOSED:	YES ☐	NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐		BY: CL
	BACKSIDE COLOR:			FACTORY CAULK: YES ☐ NO ☐		




INDIVIDUAL CLIP

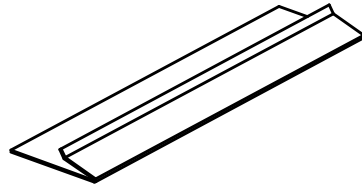


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

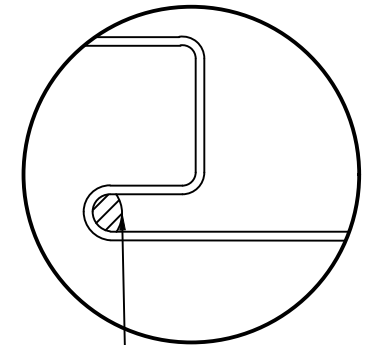


OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

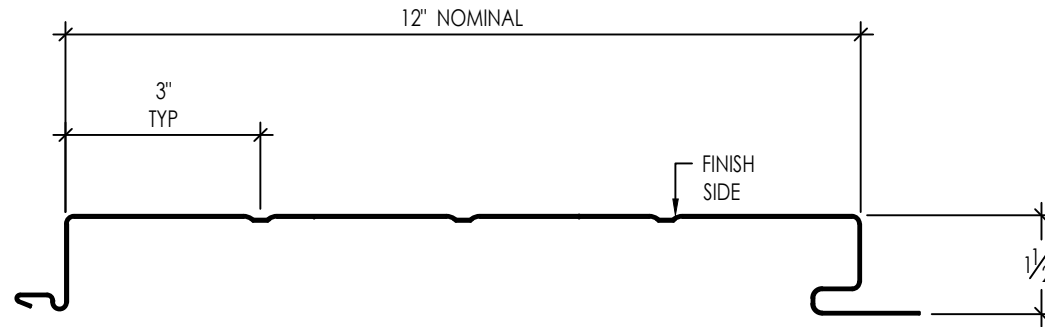


- GENERAL NOTES:**
1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
 2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
 3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
 4. OIL-CANNING NOT CAUSE FOR REJECTION.
 5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
 6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan


APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:	F-12-3
	GAUGE:	JOB NAME:	P.N.: C203
	YES ☐ NO ☐	SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐	REV.:04/04/2024
	FACTORY CAULK: YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐	BY: CL



SIDE STITCHED



OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

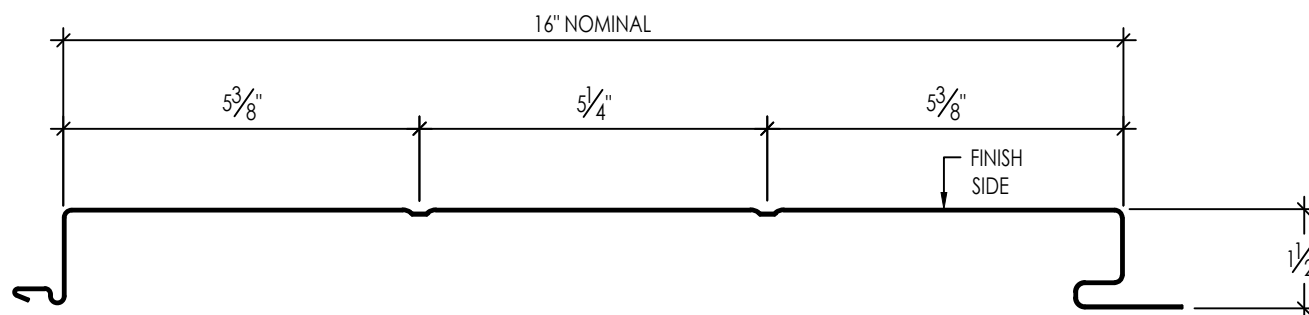


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan


APPROVED BY:	DATE:	JOB NO.:	F-16-2
	CUSTOMER:	JOB NAME:	P.N.: C232
	COLOR:	GAUGE:	SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐
	BACKSIDE EXPOSED: YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐	REV.: 04/04/2024
	BACKSIDE COLOR:	FACTORY CAULK: YES ☐ NO ☐	BY: CL



SIDE STITCHED




OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

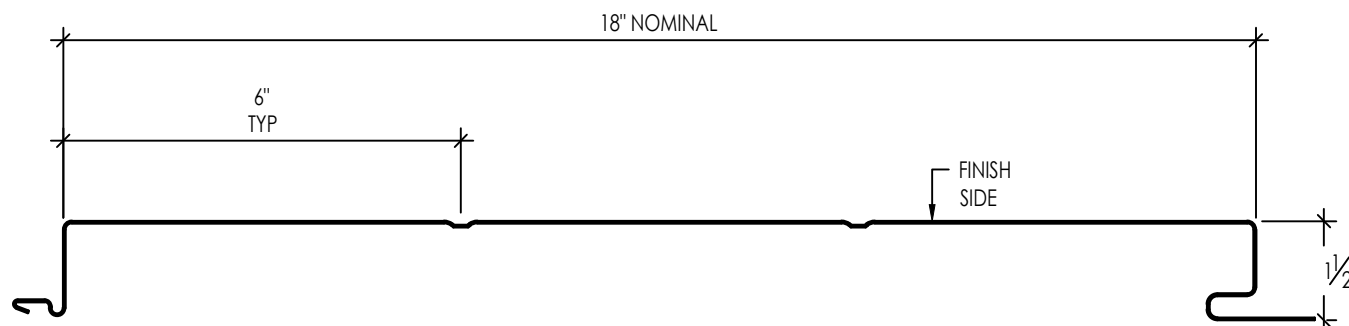


- GENERAL NOTES:**
1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
 2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
 3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
 4. OIL-CANNING NOT CAUSE FOR REJECTION.
 5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
 6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

	APPROVED BY:		DATE:		JOB NO.:		F-18-2		
	CUSTOMER:				JOB NAME:				P.N.: C252
	COLOR:		GAUGE:		SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐		REV.:04/04/2024		
	BACKSIDE EXPOSED:		YES ☐ NO ☐		INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐			BY: CL	
	BACKSIDE COLOR:				FACTORY CAULK: YES ☐ NO ☐				




INDIVIDUAL CLIP


NEGATIVE PRESSURE
CLIPS

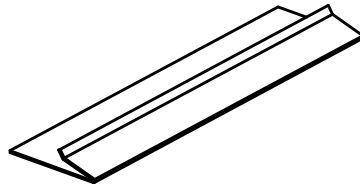


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS



GENERAL CLIP ENGAGEMENT

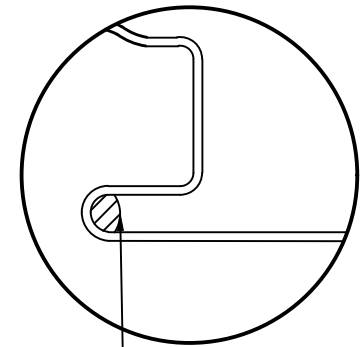

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

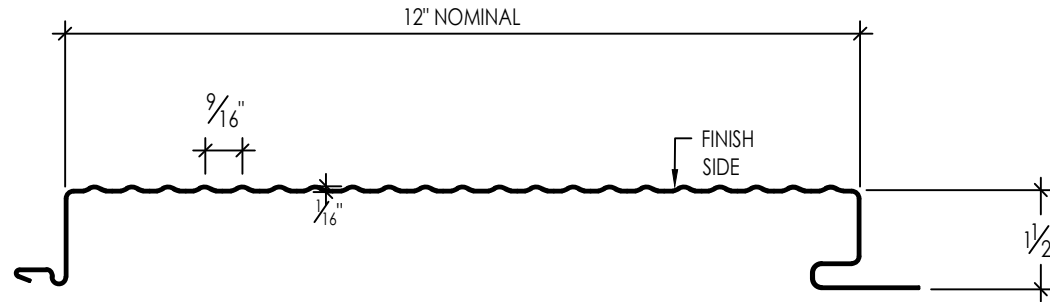


GENERAL NOTES:

1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES


Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:	F-12-S-E
	GAUGE:	JOB NAME:	P.N.: C205
	YES ☐ NO ☐	SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐	REV.:04/04/2024
	FACTORY CAULK: YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐	BY: CL




INDIVIDUAL CLIP


NEGATIVE PRESSURE
CLIPS

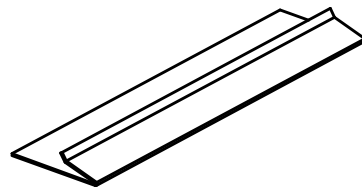


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS



GENERAL CLIP ENGAGEMENT

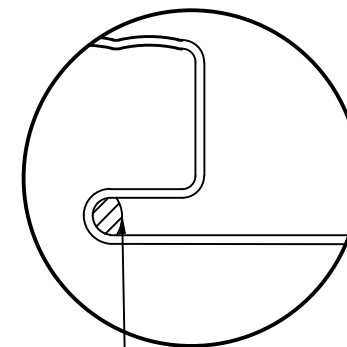

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

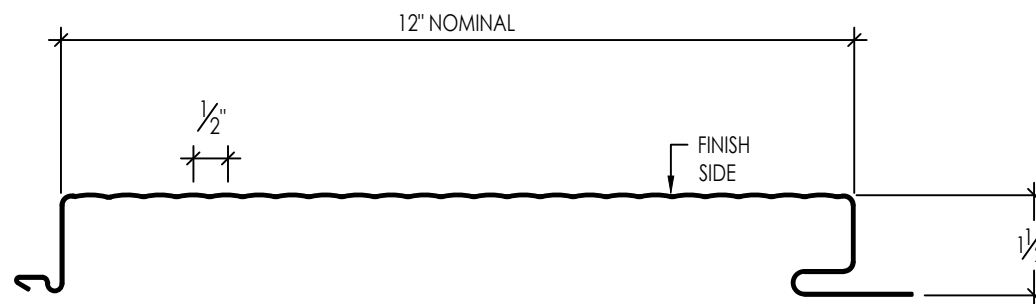


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY:	DATE:	JOB NO.:	F-12-S-WS
	CUSTOMER:	JOB NAME:	P.N.: C204
	COLOR:	GAUGE:	SMOOTH ☐ EMBOSSSED ☐ PERF.: Y ☐ N ☐
	BACKSIDE EXPOSED: YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐	REV.:04/04/2024
	BACKSIDE COLOR:	FACTORY CAULK: YES ☐ NO ☐	BY: CL




INDIVIDUAL CLIP

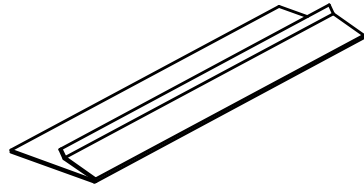


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS



GENERAL CLIP ENGAGEMENT

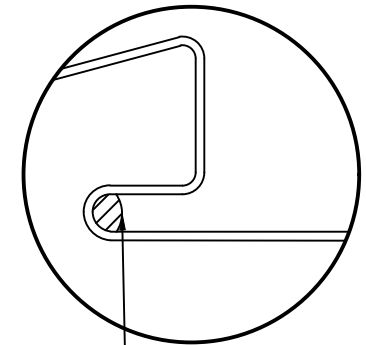

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

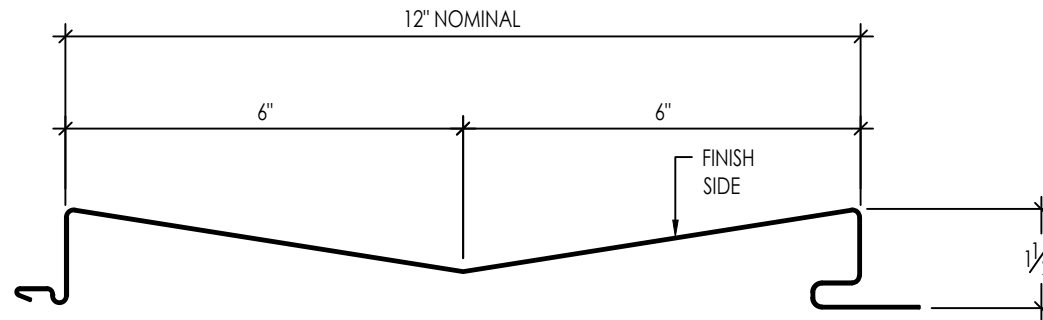


GENERAL NOTES:


1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:		W-12
	JOB NAME:		P.N.: C700	
	GAUGE:	SMOOTH ☐ EMBOSSSED ☐	PERF.: Y ☐ N ☐	REV.:04/04/2024
	YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐		
	FACTORY CAULK: YES ☐ NO ☐		BY: CL	




INDIVIDUAL CLIP

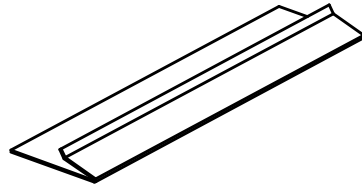


CONTINUOUS CLIP
SUPPLIED AT 10' LENGTHS


NEGATIVE PRESSURE
CLIPS

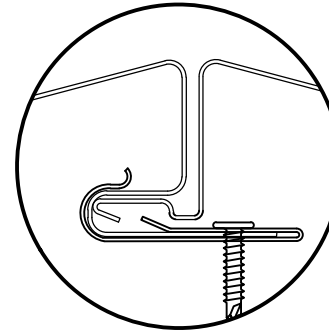

GENERAL CLIP ENGAGEMENT

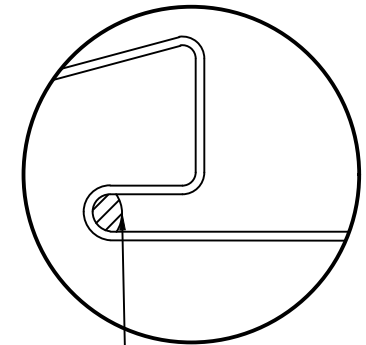

OPTIONAL FACTORY SEALANT
(BUTYL PLACEMENT)

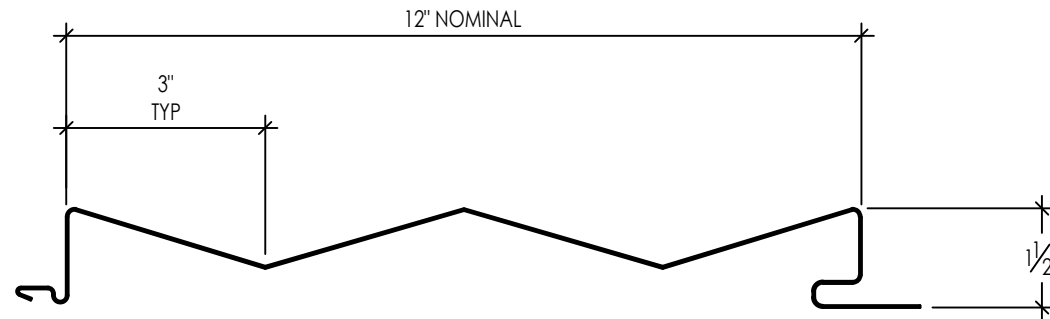

GENERAL NOTES:

1. ALL DIMENSIONS ARE NOMINAL. PANEL PROFILES MAY NOT BE TO SCALE.
2. DIMENSIONS AND ANGLES MAY VARY SLIGHTLY BETWEEN GAUGES.
3. THE CUSTOMER IS RESPONSIBLE FOR ALL INFORMATION ON THIS DOCUMENT.
4. OIL-CANNING NOT CAUSE FOR REJECTION.
5. FOR PERFORATED PANELS CLIPS ARE NOT REQUIRED ,PANELS NEED TO BE STITCHED OR EXPOSED FASTENED-SEE TYPICAL PERFORATED ASSEMBLY DETAILS.
6. REFER TO MORIN STANDARD INSTALLATION MANUAL FOR ADDITIONAL NOTES

Morin
By Kingspan

APPROVED BY: CUSTOMER: COLOR: BACKSIDE EXPOSED: BACKSIDE COLOR:	DATE:	JOB NO.:		Z-12
	JOB NAME:		P.N.: C750	
	GAUGE:	SMOOTH ☐ EMBOSSSED ☐	PERF.: Y ☐ N ☐	REV.: 04/04/2024
	YES ☐ NO ☐	INSTALLATION: HORIZ. ☐ VERT. ☐ OTHER ☐		
	FACTORY CAULK: YES ☐ NO ☐		BY: CL	