


SWL


The SWL profile utilizes a minimalistic snap-lock seam design for simple installation on roof or wall applications. It is ideal for installing over a weatherproof barrier as an architectural panel to shed rainwater and achieve a sleek design intent.

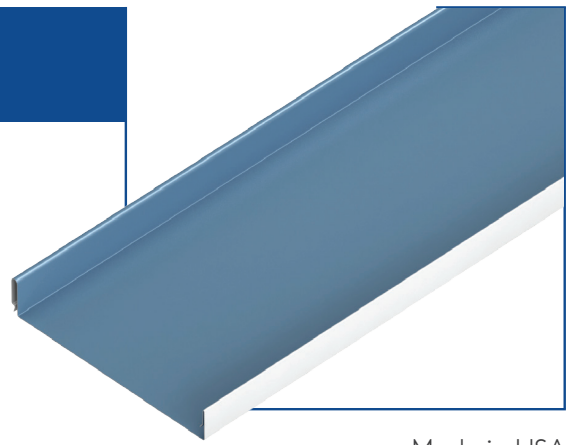


Made in USA

Product Specification


Panel Profile

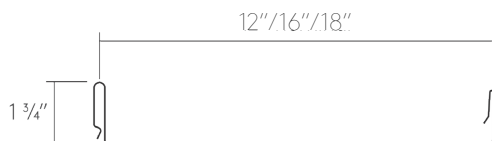

Assembly Detail



SWL Clip

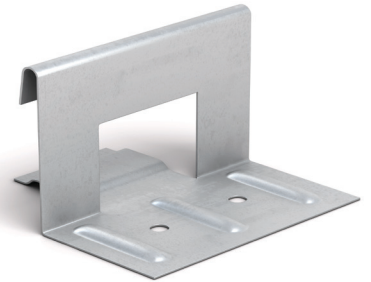

Specs

Height:

1.75"
44.45mm

Width:

12", 16", 18"
304.8mm, 406.4mm, 457.2mm

Lengths*:

5' to 40'
1.52m to 12.19m

**Please contact Morin's Technical Department for shorter or longer lengths.*

Materials

Galvalume:

24, 22 Ga

Aluminum:

.032, .040

Options*

Striations:

Yes

Ribs:

Yes

Factory-applied sealant:

Yes - Caulking

**Please contact your local Morin representative for all options capabilities.*

Product Highlights

- ❑ On-site roll forming of panels in continuous lengths is available to eliminate panel end laps
- ❑ Suitable for roofs with 2:12 slope or greater
- ❑ Snap-lock joinery for seamer-free, easy assembly
- ❑ Optional batten available for a clean, finished look
- ❑ Panels cannot be curved or tapered
- ❑ Standard and custom finish options available
- ❑ Not suitable for open framing, requires installation over a solid substrate



For the latest product information please visit www.morincorp.com
Care has been taken to ensure that the contents of this publication are accurate, but Morin Corporation does not accept responsibility for errors or information that is found to be misleading. Suggestions for, or description of, the end use or application of products or methods of working are for information only and Morin Corporation accepts no liability in respect thereof.



Morin
By Kingspan