
Symmetry


The Symmetry system is a batten seamed roof solution designed to withstand the toughest environments. The identical "T" shaped joints allows easy panel installation and replacement, accomodates thermal movement, and provides significant wind uplift resistance.

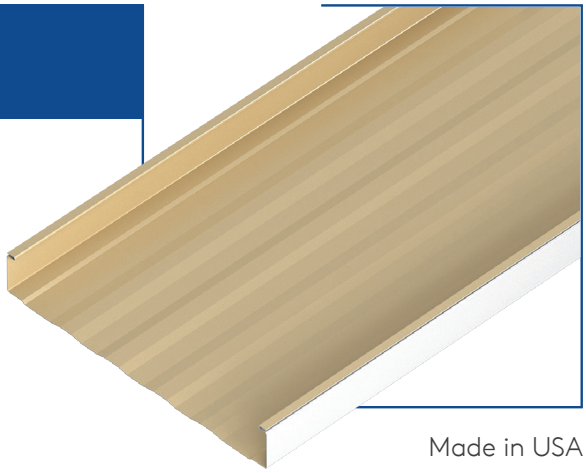


Made in USA

Product Specification


Panel Profile

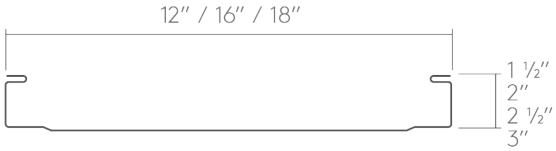

Assembly Detail



Symmetry Clip



Specs

Height:
1.5", 2", 2.5", 3"
38.1mm, 50.8mm, 63.5mm, 76.2mm

Width:
12", 16", 18"
304.8mm, 406.4mm, 457.2mm

Length*:
5' to 40'
1.52m to 12.19m

**Please contact Morin's Technical Department for shorter or longer lengths.*

Materials

Galvalume:
24, 22, 20 Ga

Aluminum:
.040, .050

Options*

Striations:
Yes

Ribs:
Yes

Factory-applied sealent:
Yes - Hot melt adhesive

**Please contact your local Morin representative for all options capabilities.*

Product Highlights

- On-site roll forming of panels in continuous lengths is available to eliminate panel end laps
- Watertight seam from eave to ridge for slopes as low as 1/2: 12
- Symmetry panels have the same interlocking clip leg on each side, so two directional install is possible
- Designed to allow unlimited thermal expansion and contraction
- Significant wind uplift capacity
- Standard and custom finish options available
- Suitable for open framing installation

PLANET PASSIONATE

For the latest product information please visit www.morincorp.com
Care has been taken to ensure that the contents of this publication are accurate, but Morin Corporation does not accept responsability for errors or information that is found to be misleading. Suggestions for, or description of, the end use or application of products or methods of working are for information only and Morin Corporation accepts to liability in respect thereof.

CODE COMPLIANCE
Intertek

VERIFIED
ENVIRONMENTAL PRODUCT DECLARATION

Morin®
By Kingspan

November 17, 2026