


# Symmetry


The Symmetry system is a batten seamed roof solution designed to withstand the toughest environments. The identical "T" shaped joints allows easy panel installation and replacement, accommodates thermal movement, and provides significant wind uplift resistance.

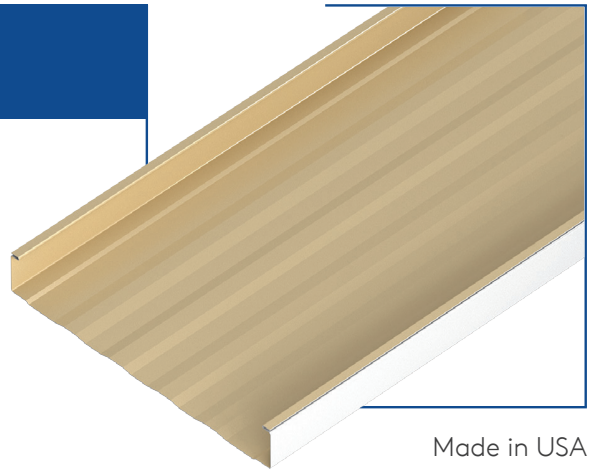


Made in USA

## Product Specification


### Panel Profile

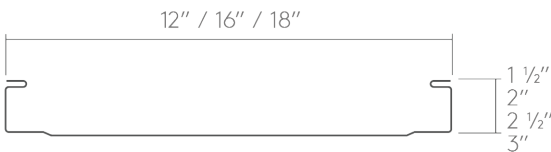

### Assembly Detail



### Symmetry Clip



### Specs

#### Height:

1.5", 2", 2.5", 3"  
38.1mm, 50.8mm, 63.5mm, 76.2mm

#### Width:

12", 16", 18"  
304.8mm, 406.4mm, 457.2mm

#### Length\*:

5' to 40'  
1.52m to 12.19m

*\*Please contact Morin's Technical Department for shorter or longer lengths.*

### Materials

#### Galvalume:

24, 22, 20 Ga

#### Aluminum:

.032, .040, .050

### Options\*

#### Striations:

Yes

#### Ribs:

Yes

#### Factory-applied sealant:

Yes - Hot melt adhesive

*\*Please contact your local Morin representative for all options capabilities.*

## Product Highlights

- On-site roll forming of panels in continuous lengths is available to eliminate panel end laps
- Watertight seam from eave to ridge for slopes as low as 1/2: 12
- Symmetry panels have the same interlocking clip leg on each side, so two directional install is possible
- Designed to allow unlimited thermal expansion and contraction
- Significant wind uplift capacity
- Standard and custom finish options available
- Suitable for open framing installation



For the latest product information please visit [www.morincorp.com](http://www.morincorp.com)  
Care has been taken to ensure that the contents of this publication are accurate, but Morin Corporation does not accept responsibility for errors or information that is found to be misleading. Suggestions for, or description of, the end use or application of products or methods of working are for information only and Morin Corporation accepts no liability in respect thereof.



**Morin**  
By Kingspan